



Quick Guide

HSL 10 Handset Lifter

SENNHEISER
COMMUNICATIONS



- 1** Before removing the adhesive tapes, hold the HSL 10 on top of or close to the loudspeaker of your telephone. Test the lifter's position by making sure that the HSL 10 lifts and lowers the handset in the proper place.

- 2** Once you have found the best place to attach the HSL 10 to the telephone, remove the backing from the adhesive mounting tapes and attach it.

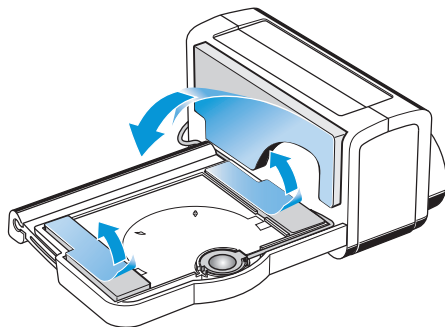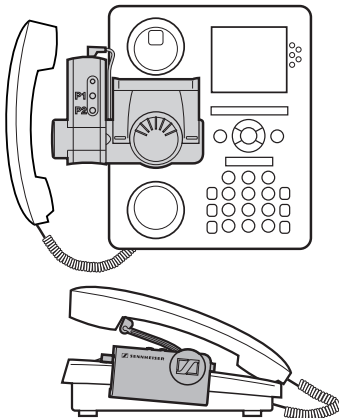


3 Adjust the lifting height of the HSL 10 as follows:

1. Press and hold the "P1" and "P2" buttons until the LED flashes blue and red.
2. Press the "P1" button to increase or the "P2" button to decrease the lifting height.
3. Press and hold the "P1" and "P2" buttons until the LED stops flashing. The settings are stored.

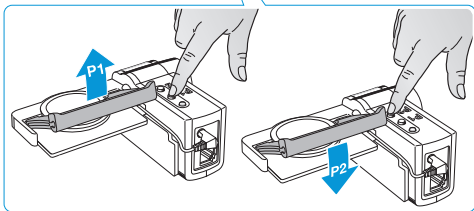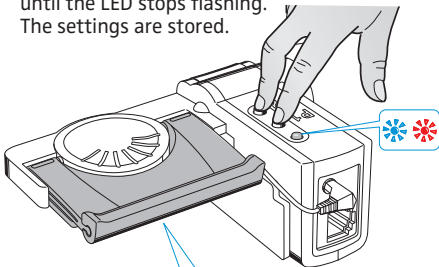

4 Teach/record one or two different ring tones of your telephone as follows:

1. Press and hold the "P1" or "P2" button until the LED flashes (holding P1 will cause blue flash, P2 will cause red flash).
2. Make a call to your telephone to detect and record the ring tone. If the recording was successful, the LED flashes three times (these flashes will be red if P1 was used, blue if P2 was used). If the recording was not successful, try again or use the other button "P1" or "P2".

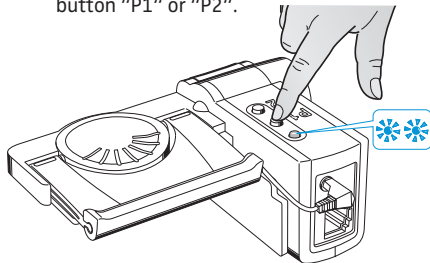

 **SENNHEISER**
COMMUNICATIONS

Sennheiser Communications A/S
Langager 6, 2680 Solrød Strand, Denmark
www.senncom.com
Printed in China, Publ. 01/10, A01